

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>		Attorney Docket No.	113304		Total Pages	26	
		First Named Inventor or Application Identifier				<div style="font-size: 2em; transform: rotate(-45deg); display: inline-block;">A</div>	
		Richard Zaffino					
		Express Mail Label No.	EM365589669US				

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, D.C. 20231
---	---

06/11/99
 Jc551 U.S. PTO
 09/330272
 06/11/99

1. ☒ **Fee Transmittal Form**
(submit an original, and a duplicate for fee processing)

Specification [Total Pages 16]
(preferred arrangement set forth below)

Descriptive title of invention

Cross References to Related Applications

Statement Regarding Fed sponsored R&D

Reference to Microfiche Appendix

Background of the Invention

Brief Summary of the Invention

Brief Description of the Drawings (if filed)

Detailed Description

Claim(s)

Abstract of the Disclosure

3. ☒ **Drawing(s)** (35 USC 113) [Total Sheets 3]

4. **Oath or Declaration** [Total Pages 2]

a. ☒ **Newly executed** (original or copy)

b. ☐ **Copy from a prior application** (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
 named in the prior application, see 37 CFR
 1.63(d)(2) and 1.33(b)

☐ **Incorporation by reference** (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath
 or declaration is supplied under Box 4b, is considered as being part of the
 disclosure of the accompanying application and is hereby incorporated by
 reference herein.

6. ☐ Microfiche Computer Program (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other :

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No:

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

 or ☒ Correspondence address below

NAME	Samuel H. Dworetzky				
ADDRESS	AT&T CORP. P.O. Box 4110				
CITY	Middletown	STATE	New Jersey	ZIP CODE	07748-4801
COUNTRY	United States of America			FAX	732-957-5505

19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Samuel H. Dworetzky	Reg. #	27873
TELEPHONE	973-260-8120		
SIGNATURE			DATE
		June 11, 1999	

"Express Mail" Mailing Label Number EM365589669US Date of Deposit 6/11/99

I hereby certify that this application is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington D.C. , 20231

ANN E. TAYLOR

(Printed Name of Person Mailing Paper)

(Signature of Person Mailing Paper)

METHOD FOR PROVIDING ALTERNATIVE NETWORK-ASSOCIATED SERVICE ADDRESS MOBILE REGISTRATION

Cross Reference to Related Application

The present invention claims priority to provisional application Serial No. 60/113,928 entitled "Method For Providing IP-Associated Mobile Registration", the entire disclosure of which is hereby incorporated by reference.

Field of the Invention

The present invention is directed to a method and apparatus for permitting a mobile device to register for services. More particularly, the present invention is directed to a method and apparatus for shifting communication service registration from a dedicated signaling network to a general purpose data network.

Background of the Invention

Wireless services have become more and more popular. Such wireless services provide subscribers with mobility while still maintaining the ability to communicate either by voice or by data with others. As the number of wireless subscribers has increased, there has been a strain placed both on the communication networks themselves as well as the signaling networks which have been utilized for call setup, call control, and mobility management, such as the SS7 signaling network. As more sophisticated services have developed for the mobile subscriber, these services have

grown to rely heavily upon available SS7 signaling network bandwidth. The combination of this increase of services and an increase in subscriber base threatens to place undue strain on the signaling system (SS7) network.

FIG. 1 illustrates a system in which the SS7 network is utilized for providing certain registration and services to a mobile subscriber. In this system a plurality of mobile switching centers (MSC) 10, 20, 30 are all coupled to a signaling transfer point (STP) 40 via the SS7 signaling network which is represented by the dashed lines. Each MSC has one or more base stations (BS), shown as elements 11, 12, 21, 22 and 31. The system also includes a service control point (SCP) and home location register (HLR), here shown as combined element 50. This element keeps track of information related to subscribers that are given wireless service. For example, as shown in the figure, the HLR maintains information about a number of mobile stations here shown as MS₁, MS₂, and MS_x. The HLR keeps profile information in a database regarding various mobile subscribers. As an example, each profile can indicate information about the mobile identification number (MIN), the electronic serial number (ESN), information about where the mobile station is currently registered (that is, with which MSC the mobile station last registered), as well as a list of services for which the mobile subscriber has subscribed. Examples of services which may be available include: call waiting, caller ID, four-digit dialing, and other services which might be available to wireless users provided by various wireless service carriers.

Another element in the system is a Message Center (MC) 60. Such a Message Center, typically employed in wireless systems which provide a service known as Short Messaging Service (SMS) to subscribers, contains text messages which are to be provided to mobile stations. The messages typically are transported from MC 60 to the appropriate MSC via the SS7 network and are subsequently forwarded to the intended recipient mobile station MS.

Another element shown in the system is the Wireless Gateway Manager (WGM) 70 which can couple a plurality of wireless office systems (WOS) 71, 72 and 73 to the STP via, for example, a frame relay network 75. As is shown in the figure, at least one of the wireless office systems may include a voice mail system (VM) 76.

5 In the system of FIG. 1, presume that MS_x 83 is one of the subscribers to the wireless service and has an affiliation with the voice mail system 76 and desires to receive a message waiting indicator (MWI) from that voice mail system even when away from the wireless office system 73. To accomplish that end in the prior art, the MS_x registers with the MSC 10 via the base station 12 with which it is operating. MSC 10 then becomes the serving MSC (S-MSC) and sends a registration notification to SCP/HLR 50. This registration notification is transported via the SS7 network and through the signal transfer point 40. The SCP/HLR 50 in turn signals the VM 76 via the SS7 network, the STP 40, the WGM 70, the frame relay 75 and its associated WOS 73 so as to advise the VM as to where the MS_x resides. If the VM has a message about which it desires to advise the MS_x, then further signaling is transported via the SS7 network to the S-MSC 10 and a message waiting indication is sent out to the mobile station MS_x 83. Alternatively, the HLR could have updated its own MWI information sometime prior to the registration by MS_x and in such circumstance the HLR sends MWI information to the S-MSC. As can be seen, the signaling to provide this one service alone entails a not insignificant usage of the SS7 network. Other services, such as providing short messages from the message center via SS7 to the serving MSC, further burden the signaling network. Another service that consumes signaling network resources relates to voice messaging systems connected to MSCs whereby the SCP/HLR 50 updates its subscriber records concerning such messages and uses the signaling network to do so. Moreover, the very notion of carrying user data, rather than conventional signaling data such as call control, may itself be a burden on the signaling

network. It would be beneficial if a technique could be provided for off-loading some of the subscriber services' demand from the SS7.

5 Summary of the Invention

The present invention provides a method by which certain functionality that supports services to be offered to wireless subscribers is off-loaded from the signaling system network and is instead provided by an alternative network. The present invention accomplishes this method, in part, by utilizing communication between a service node (e.g., MSC) and a service control point (SCP) (e.g., HLR).

For purposes of the present invention, an alternative network encompasses both connection-oriented and connectionless (e.g., packet) networks. In addition, a connection-oriented network may include both circuit and packet (e.g., ATM) switching.

In one embodiment of the present invention, the registration process by which a S-MSC notifies the subscriber's HLR includes a transfer of information sufficient to enable subsequent data communication via a packet network (e.g., Internet Protocol (IP) network). For example, the S-MSC may notify the HLR of a packet network address at which it can be contacted to provide a given service to the mobile station in question. Alternatively, the HLR can advise the S-MSC of a packet network address which it can utilize to provide a given service to be made available to the mobile station subscriber.

In this arrangement, data communications necessary to support providing of the services provided to wireless subscribers is carried in a network separate from the signaling network normally utilized for call control and call management.

25 Brief Description of the Drawings

FIG. 1 illustrates a prior art system.

FIG. 2 illustrates a system in accordance with an embodiment of the present invention.

FIG. 3 illustrates a signal flow in connection with an embodiment of the present invention.

5

Detailed Description

In accordance with the present invention, data transfers to be used to support services for a wireless subscriber can be shifted from the SS7 network to a alternative network, including, but not limited to, connection oriented networks and connectionless networks. For example, at registration time the S-MSC and the subscriber's HLR can exchange sufficient information so as to enable service support information to be transferred to and from the S-MSC via an alternative network such as a packet network (e.g., the Internet). In such a circumstance, the S-MSC can then provide the HLR with one or more packet network addresses that will support various services available to the mobile stations registered with that S-MSC. Alternatively, the HLR can forward packet network address information with regard to those system elements which will support services to be provided to the S-MSC and on to the mobile subscriber registered therewith.

The illustrative embodiments below speak in terms of an IP network; however it should be understood that any alternative network could be used. The illustrative embodiments below also speak in terms of a HLR; however it should be understood that any SCP could be used, including, but not limited to a HLR, an Authentication Center (AC), a VM, a Digit Translation Application (DTA), or a MC. In addition, the illustrative embodiments below speak in terms of a S-MSC; however, it should be understood that any service node could be used.

FIG. 2 illustrates, in block diagram form, a system in accordance with an embodiment of the present invention. Elements in FIG. 2 which are the same as those

in FIG. 1 are shown with the same reference symbols. The modifications to the various network elements include the capability of communicating via the IP network 200.

While only MSC 100 is shown to be connected to the IP network, the other MSCs 20 and 30 could be modified to be so coupled or be capable of coupling to the IP network.

5 Similarly, the WGM 70 may be coupled to the IP network as well, although in the example shown in FIG. 2 it is not. By providing elements such as MSC 100, message center 600, SCP/HLR 500 and VM 760 with the ability to communicate over the IP network 200, it presents an opportunity for shifting certain data communications which would otherwise occur in support of services for a subscriber from the SS7 network to the IP network. For example, rather than, as in the prior art, carrying the message waiting indicator information or the short messages via the SS7 network to the serving MSC 10 for mobile station MS_x, that service information could instead be carried via the IP network 200 to an IP address for MSC 100. The packet message would include information identifying the mobile station for which the service is to be rendered, here MS_x. The processing capabilities in the MSC would then take the received packet data information and provide the appropriate service to the mobile station. For example, the voice mail system 760 may transfer its message waiting indication via the IP network 200 to MSC 100, which in turn would understand that such an indication should be transmitted to MS_x 83 via typical message waiting indication signaling from base station 12.

FIG. 3 illustrates a process flow which may occur in connection with an embodiment of the present invention. Here, MS_x may register via an over-the-air interface with MSC 100 which becomes S-MSC. This registration may take place via a standard registration signal in the IS-136 protocol. The S-MSC then sends a registration notification signal (REGNOT) via SS7 to the HLR 500. This notification signal is found in the ANSI-41 protocol or in the Global System for Mobile Communications (GSM). If the S-MSC supports the service of Message Waiting Indication (MWI), via

for example an IP network, then it can so notify the HLR along with the registration signal and can designate to the HLR a IP network address, herein IP address α , at which the serving MSC can receive information to support the providing of this service to any mobile station with which it is in communication. The HLR can then, in turn, send a message via the SS7 network to the voice mail system 760. The information can include an address update with respect to the particular mobile station MS_x . The HLR knows to signal this particular voice mail system 760 based on the subscriber profile which it stores regarding MS_x . It then can notify the voice mail system that when the voice mail system 760 wishes to send an MWI to MS_x , it should send it to the IP address corresponding to the serving MSC. When the voice mail system subsequently has a message waiting indication update for MS_x , it can send such an update via the IP network 200 to IP address α . Upon receipt of this update, the S-MSC 100 processes the packet data information and generates the message waiting indication information which must be sent over the air via, for example, IS-136 standards to the MS_x .

In the embodiment that has just been described, the HLR can signal the voice mail system via the SS7 network. To further reduce the load on the SS7 network, it is possible that the HLR will maintain information in its subscriber profile regarding the IP address of the VM 760. Since this information is not likely to change often, it can be utilized frequently without needing to transfer information to the VM via SS7. Therefore, the method described above could be modified such that the address update is transmitted to the VM at its IP address which has been stored in the HLR.

Also shown in FIG. 3 is an alternative technique for exchanging packet network address information. Rather than the S-MSC assuming the responsibility for defining its own IP address to support a particular service, it is possible that the HLR in either its acceptance of the registration, here shown as the ACCEPT message, or in some other subsequent message exchange with the S-MSC, could transfer information to the MSC identifying a given service (for example service ABC) and an IP address that the S-MSC

should utilize to support the service (here IP address β). Thus, the S-MSC can define its IP address, or it can receive an IP address necessary to support a service, or there could be some combination of exchanges. Furthermore, with regard to the transmissions between the HLR and the VM described above, it is conceivable that the very first transmission between the S-MSC and the HLR could include an IP address from the S-MSC which defines a location by which the HLR and S-MSC can communicate to establish all of the remaining information necessary to support the services between the MSC and the HLR. That is, rather than the MSC specifically identifying individual services that it supports via the SS7 network, it could simply send an IP address notifying the HLR where to go to find out the services that the S-MSC supports and to communicate with that S-MSC to exchange data necessary to support a full range of services to be made available to a mobile station MS_x .

Furthermore, variations on the S-MSC/HLR exchange are considered as well. For instance, the S-MSC could send a list of services (list X), the list including service identifiers and an IP address for each service which may or may not be unique to a given service. The services need not be limited to data services, but can relate to voice services as well. Alternatively the HLR could send a list of services (list Y), including service identifiers and an IP address for each service which may or may not be unique to a given service. The services identified in the lists may or may not overlap. Also the lists may be dynamic, that is, subject to change. In another variation the S-MSC and HLR can exchange list X and list Y.

After the REGNOT/ACCEPT exchange, the use of the service/address pairs can vary, as follows. Referring to the first exchange, where the S-MSC sends list X, the HLR might store the Service List for its own sole use. That is, as information intended for an MS reaches the HLR (by conventional or IP associated mechanisms), the HLR would use the alternate means afforded by the service/address pair to convey information to the S-MSC and, therefore, to the MS. Alternatively, the HLR might

forward some of the service/address pairs to the node(s) associated with the indicated service. In these cases when the node receiving the new address information has new data for an MS, it would communicate with S-MSC directly and not via the HLR.

Referring to the second exchange, where the HLR sends list Y, the HLR is providing S-MSC with current service/address pairs for static or quasi-static node addresses stored at the HLR. The transfer of these service/address pairs to the S-MSC would typically be based on the HLR having prior knowledge of the S-MSC's transport capabilities. Note that the information in "Service List Y" is conveyed as part of the REGNOT/ACCEPT exchange but service/address pairs exchanged in this direction need not be limited to a registration sequence. For example, events external to the S-MSC and the HLR might occur that would cause a service node to convey to the HLR a new service/address pair for a MS. The HLR would convey this to the S-MSC - independent of registration sequences - so that the S-MSC has the correct current address for the associated service.

While the invention has been described with regard to a voice mail service, it is equally applicable to other services available to the mobile station subscriber. For example, the SMS information can be transferred from the message center to the serving MSC via the IP network as is suggested by the connections shown in FIG. 2. Alternatively, other services which rely upon data transmission to and from the serving MSC could rely on an IP network as a transport mechanism once IP addresses have been exchanged. This means that, as services increase and the number of subscribers increase, the additional load of data exchanges is passed off to the IP network rather than taxing the already heavily utilized signaling network. Furthermore, while the present invention has been described with reference to utilizing, for example, the Internet, to carry this additional information to and from the serving MSC, it should be recognized that other data networks might be employed as well; it is just that the

Internet at this time has provided an opportunity for relatively ubiquitous communication services.

While the present invention is described with respect to specific embodiments, these embodiments are not intended to limit the scope of the invention, which is defined by the appended claims.

5

177838-1

WHAT IS CLAIMED IS:

1. A method of transferring information between a subscriber and a wireless service, comprising the steps of:
 - receiving a registration request for the subscriber at a service node;
 - determining at the service node an alternative network address associated with a wireless service; and
 - transferring information between the subscriber and the wireless service using the determined alternative network address.
2. The method of claim 1, wherein said alternative network is selected from the group consisting of a connection-oriented network and a connectionless network.
3. The method of claim 2, wherein said connection-oriented network is selected from the group consisting of a circuit switched network, a packet switched network, and combinations thereof.
4. The method of claim 2, wherein the connectionless network comprises the Internet.
5. The method of claim 4, wherein said step of determining comprises the steps of:
 - sending a registration notification to a Service Control Point (SCP); and
 - receiving, from the SCP, an IP address associated with the wireless service.

1 6. The method of claim 4, wherein said step of transferring is performed in
2 accordance with a wireless network protocol.

1 7. The method of claim 6, wherein the wireless network protocol is selected from
2 the group consisting of ANSI-41 and GSM.

1 8. The method of claim 4, wherein said step of determining comprises the steps of:
2 sending a registration notification comprising a service identifier and an Internet
3 Protocol (IP) address update to a SCP; and
4 forwarding the IP address update to the wireless service.

9. The method of claim 8, wherein the step of forwarding uses a network selected
from the group consisting of a connection-oriented network, a connectionless network,
and combinations thereof.

10. The method of claim 8, wherein the registration notification further comprises an
IP address for the serving node.

11. The method of claim 4, wherein the SCP is selected from the group consisting of
Home Location Register (HLR), Authentication Center (AC), Voice mail (VM), Digit
Translation Application (DTA), and Message Center (MC).

12. A method of using an alternative network to provide wireless services
comprising:
determining a list of wireless services to be offered to a subscriber;
identifying a corresponding list of alternative network addresses for each
service;

6 communicating the wireless services list and the corresponding alternative
7 addresses list between a service node and a Serving Control Point (SCP).

1 13. The method of claim 12, wherein the step of communicating comprises:
2 sending the wireless services list and alternative network addresses list from the
3 service node to the SCP.

1 14. The method of claim 15, wherein the step of communicating comprises:
2 sending the wireless services list and alternative network addresses list from the
3 SCP to the service node.

1 15. The method of claim 12, wherein the list of wireless services and the
2 corresponding list of alternative network addresses each comprise two lists, wherein the
3 first wireless services list and its corresponding alternative network addresses list are
4 stored in the service node and the second wireless services list and its corresponding
5 alternative network addresses list are stored in the SCP; and the step of communicating
6 comprises exchanging the two sets of lists between the service node and the SCP.

1 16. The method of claim 13, further comprising the step of forwarding a single
2 wireless service and alternative network address from the SCP to a node associated with
3 the wireless service.

1 17. A method for providing services to a mobile station subscriber, the method
2 comprising the steps of:
3 storing a subscriber service profile;
4 receiving a registration notice;

5 storing first information identifying a service node with which the subscriber has
6 registered; and

7 exchanging second information with the identified service node via a first
8 network to enable a future information exchange with the identified service node via a
9 second alternative network.

1 18. The method of claim 17 wherein said step of exchanging second information
2 comprises the sub-step of receiving an alternative network address from the identified
3 service node related to a wireless service.

19. The method of claim 17 wherein said step of exchanging second information
comprises the sub-step of transmitting an alternative network address to the identified
service node related to a wireless service.

20. The method according to claim 17, wherein the first network is selected from the
group consisting of connection-oriented networks, connectionless networks, and
combinations thereof.

21. The method of claim 17, wherein the second network is selected from the group
consisting of connection-oriented networks, connectionless networks, and combinations
thereof.

22. The method of claim 4, wherein the service node comprises a serving mobile
switching center (S-MSC).

23. The method of claim 12, wherein the service node comprises a serving mobile
switching center (S-MSC).

1 24. The method of claim 17, wherein the service node comprises a serving mobile
2 switching center (S-MSC).

177838-1

A method provides for utilizing a packet-switched network to support services provisioned to mobile station subscribers. Address information is exchanged with a mobile switching center that services the subscriber so as to be able to identify data port addresses to be utilized to support the services via transmissions over a packet-switched network.

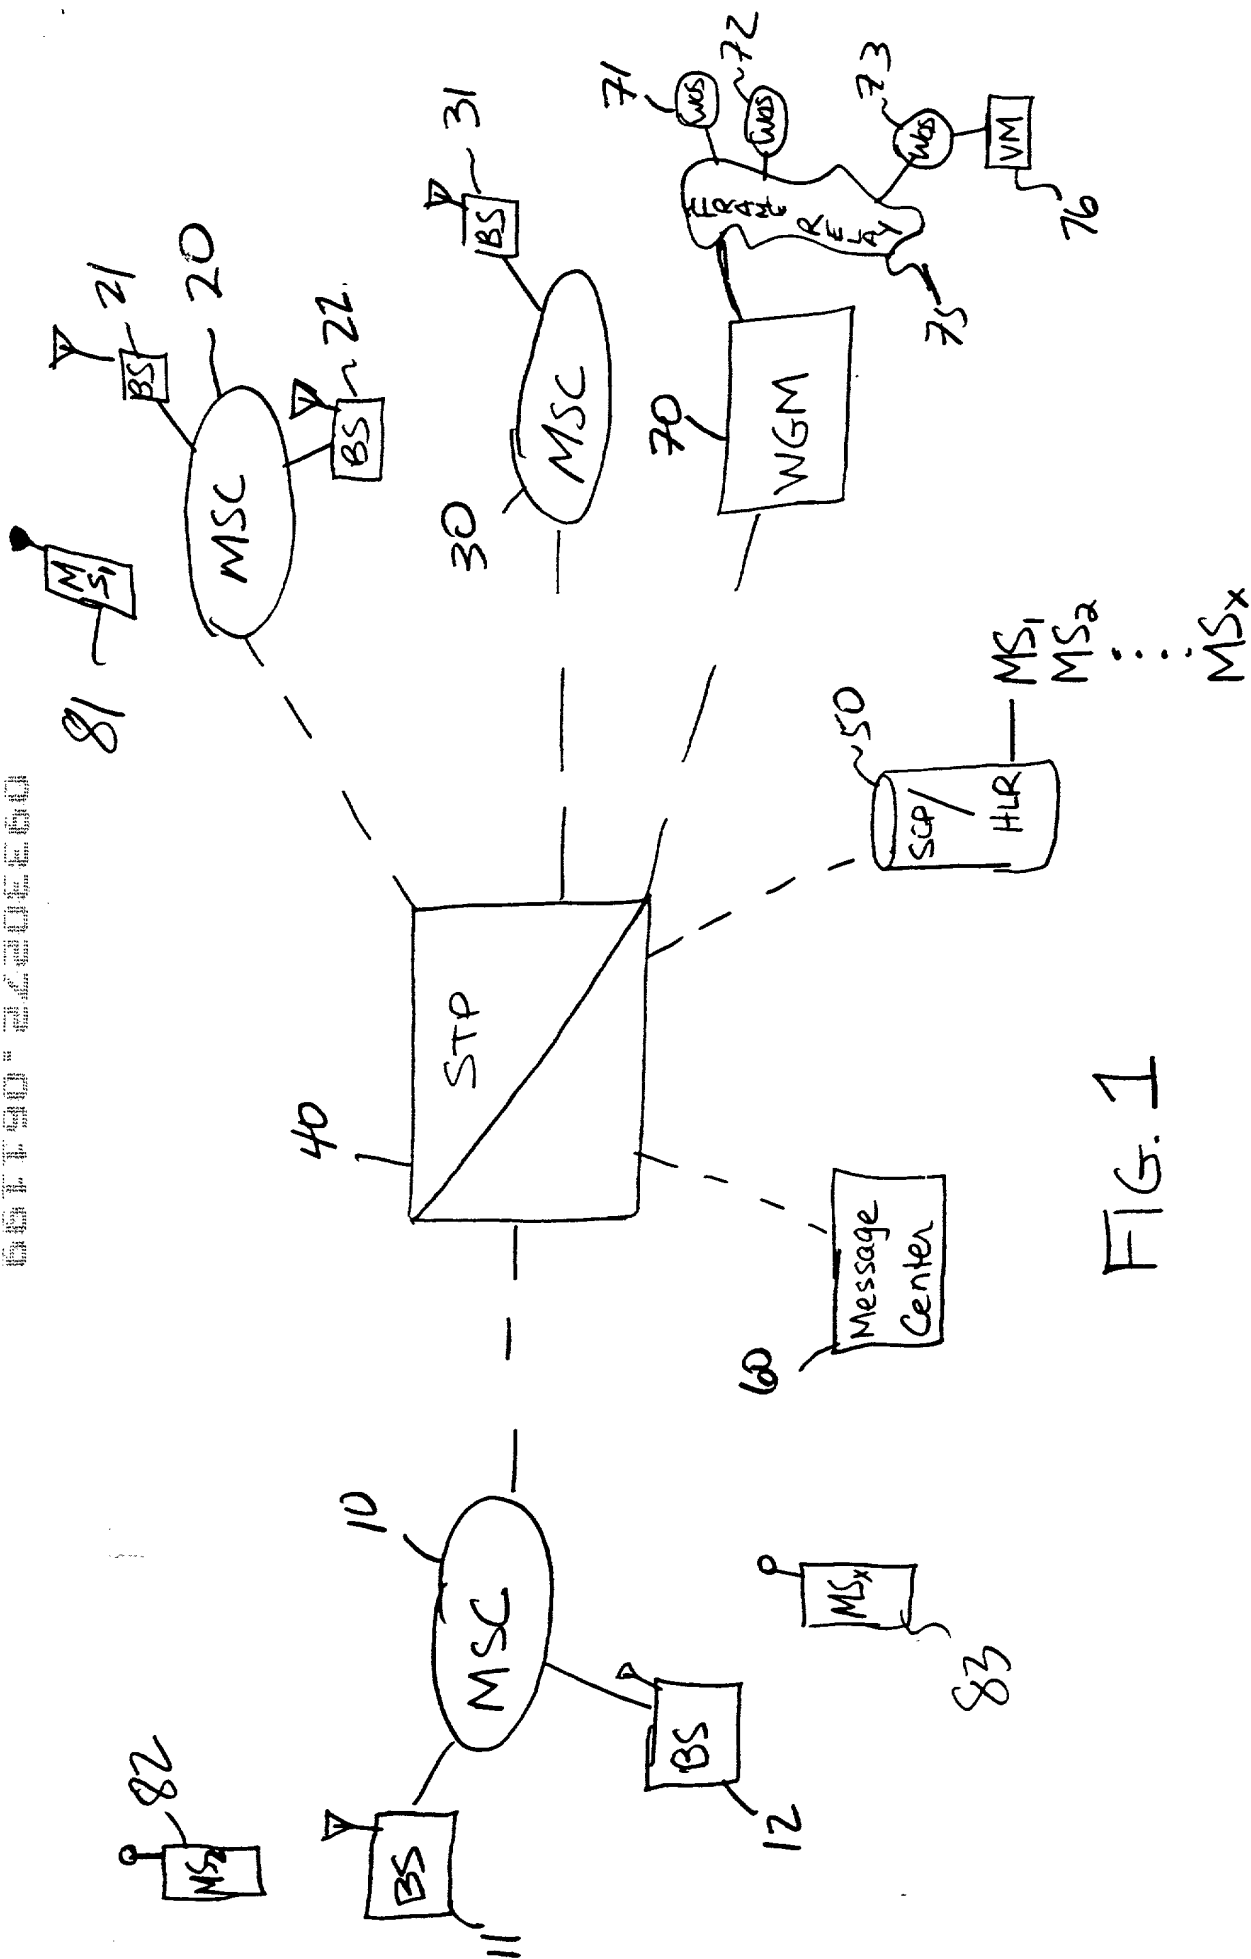


FIG. 1

PRIOR ART

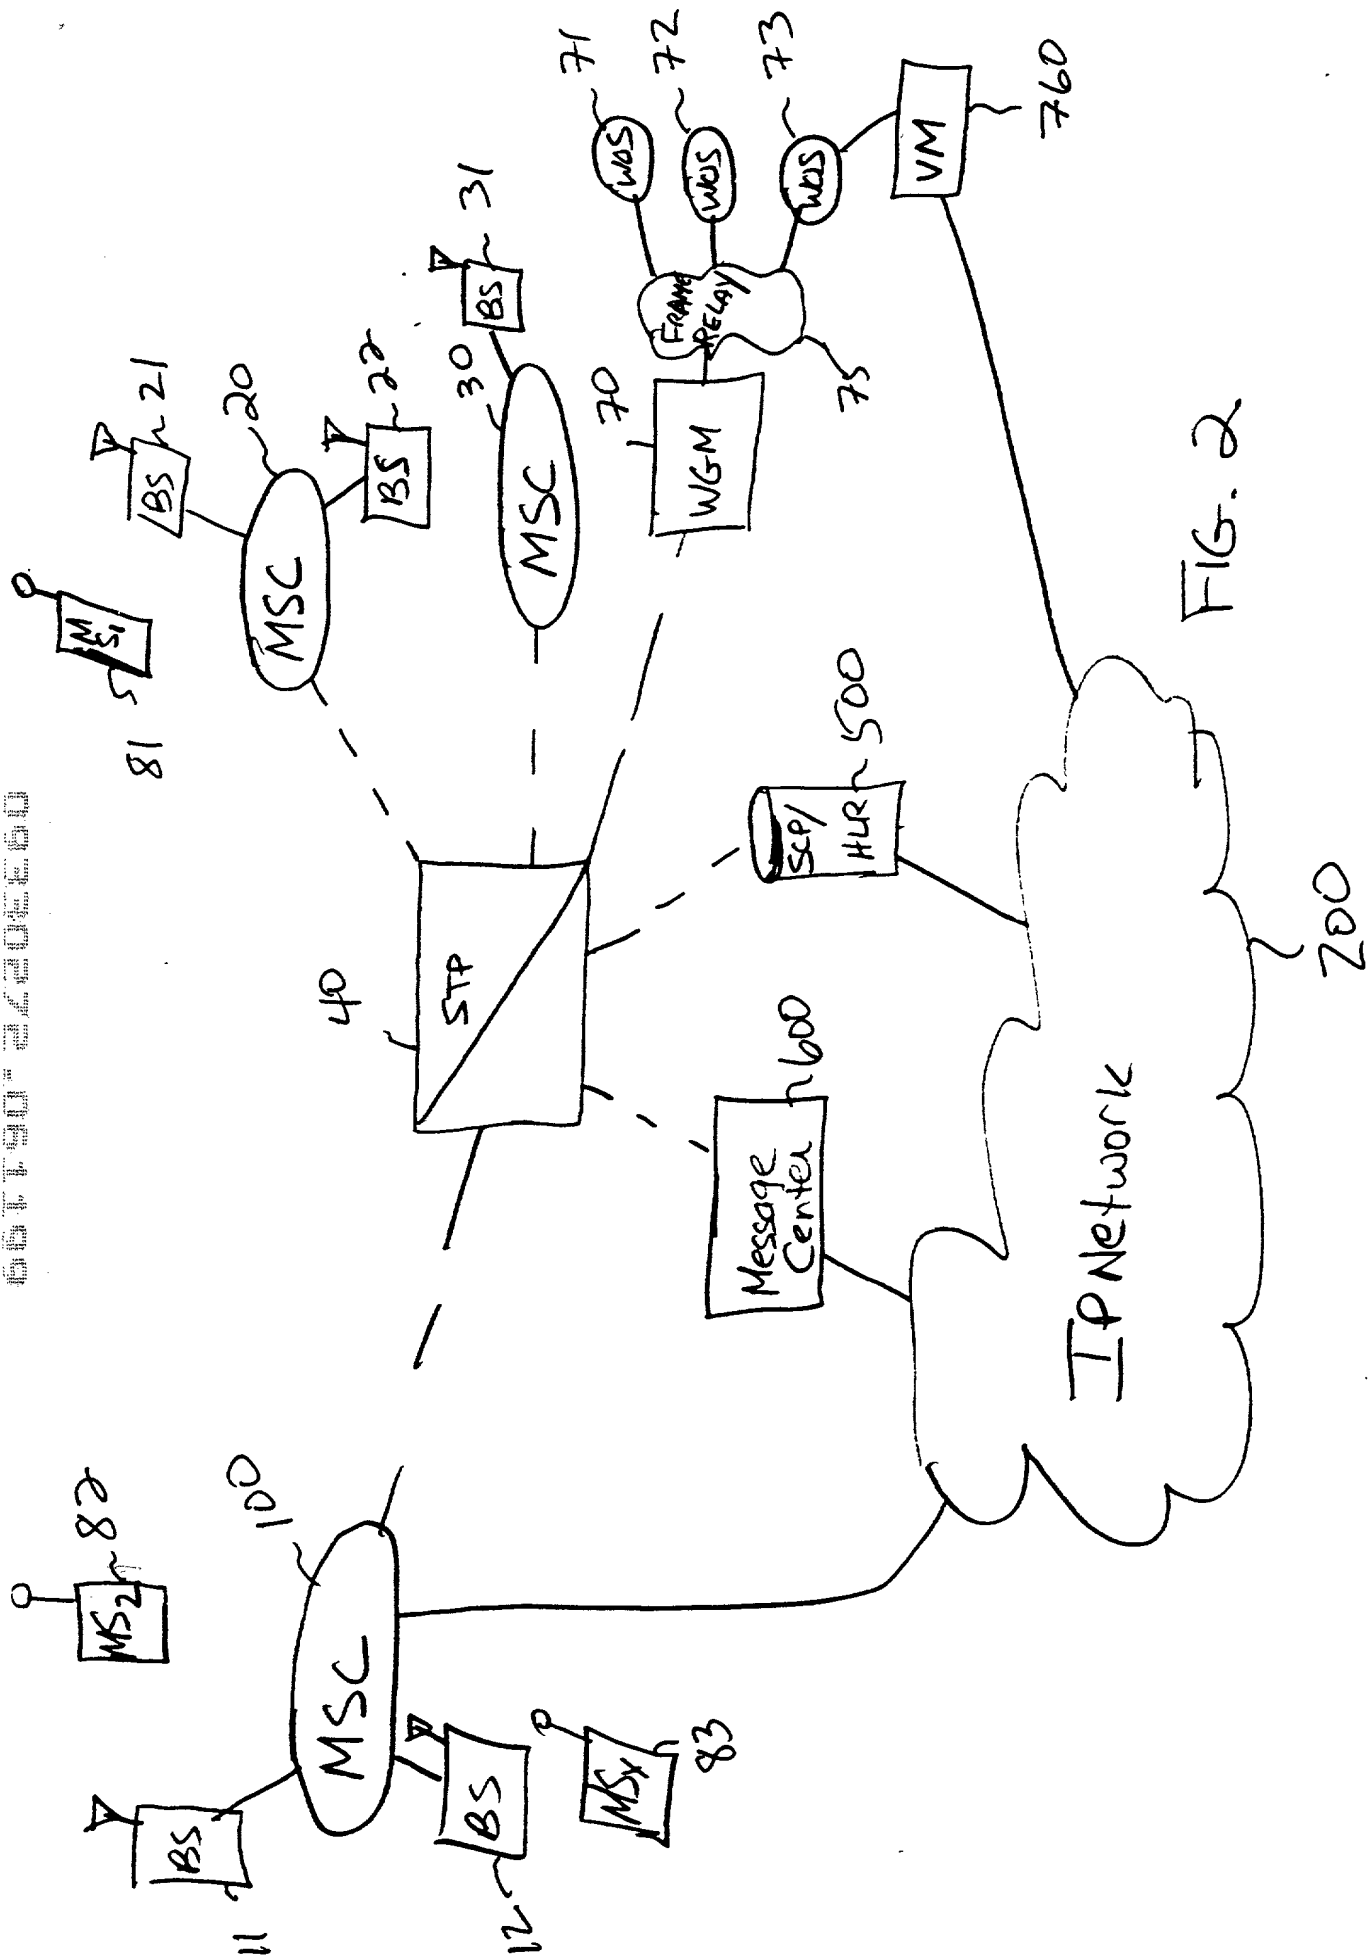


FIG. 2

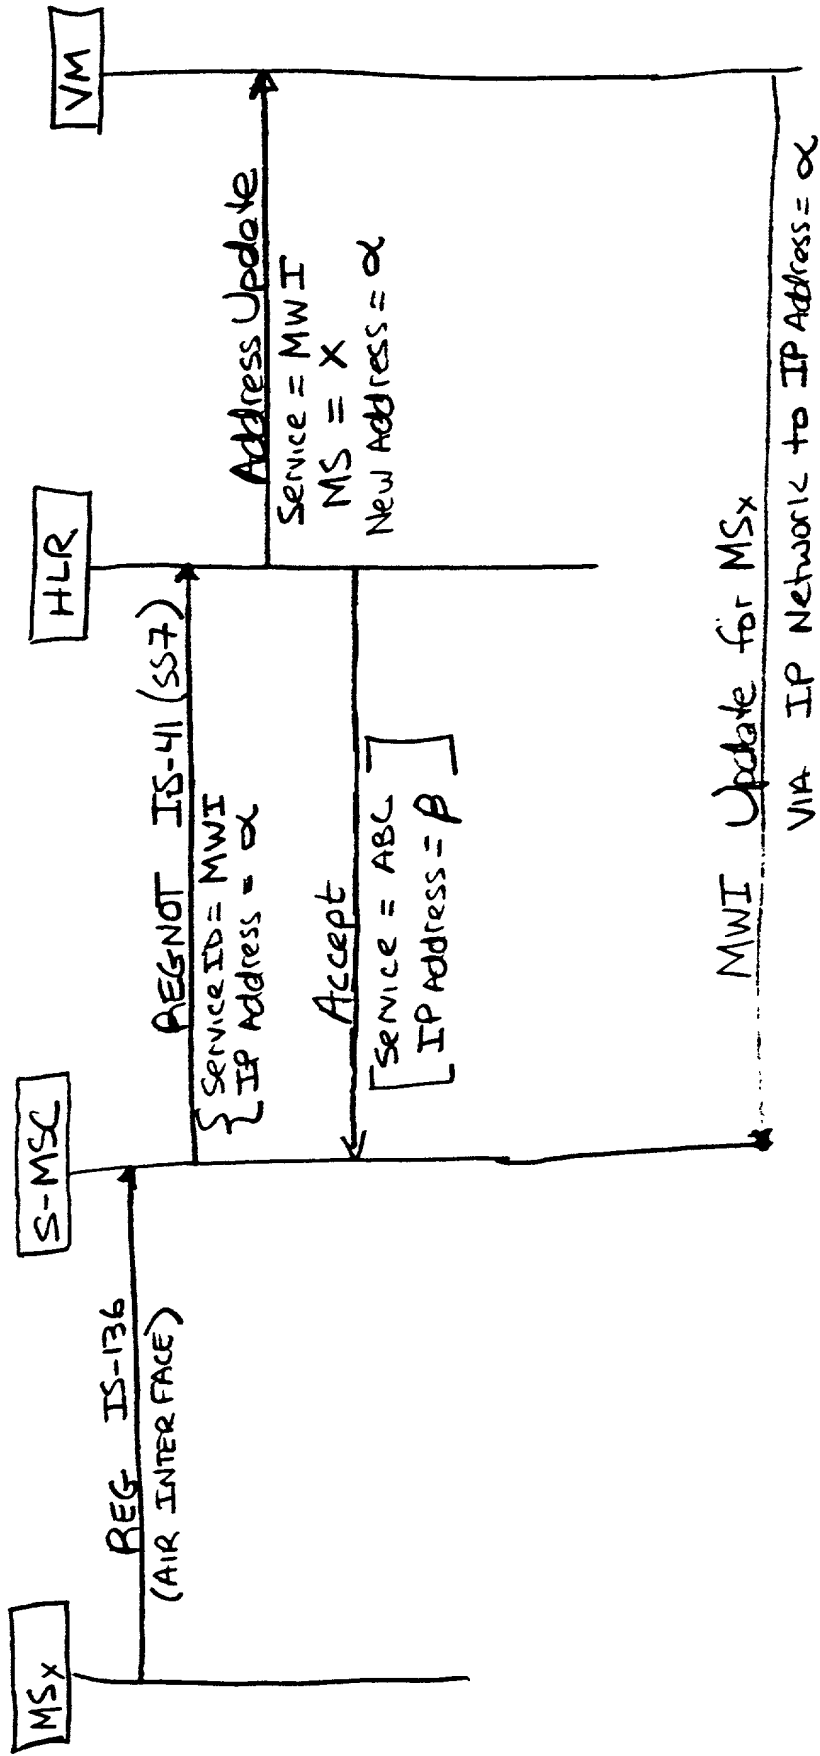


FIG. 3

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Method For Providing Alternative Network-Associated Service Address Mobile Registration**, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventors' certificate listed below and have also identified below any foreign application for patent or inventors' certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, we acknowledge the duty to disclose all information known to us to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Provisional Application Serial No. 60/113,928, filed December 24, 1998

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:


Samuel H. Dworetsky	(Reg. No. 27873)
Thomas A. Restaino	(Reg. No. 33444)
Jose de la Rosa	(Reg. No. 34810)
Michele L. Conover	(Reg. No. 34962)
Robert B. Levy	(Reg. No. 28234)
Benjamin S. Lee	(Reg. No. 42787)
Alfred G. Steinmetz	(Reg. No. 22971)

I also appoint Frank Pietrantonio (Reg. No. 32289), Gary S. Morris (Reg. No. 40735), and John F. Kacvinsky (Reg. No. 40040) of Kenyon & Kenyon as associate attorneys, with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

Please address all correspondence to Mr. S. H. Dworetsky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748. Telephone calls should be made to Samuel H. Dworetsky at 973-360-8120.

Full name of sole inventor: Richard Zaffino

Inventor's signature



Date

6/4/99

Residence: Kirkland, King County, Washington

Citizenship: United States of America

Post Office Address:

8004 N.E. 115th Way
Kirkland, Washington

98034